

## Revolutionary SIP phone with a multitude of professional features

The SIP-T46G is Yealink latest revolutionary IP Phone for executive users and busy professionals. New designs appears the commerce, with high-resolution TFT color display, delivering a rich visual experience. Yealink Optima HD technology enables rich, clear, life-like voice communications. Supports Gigabit Ethernet, a variety of device connections, including EHS headset and USB. With programmable keys, the IP Phone supports vast productivity-enhancing features.



### Key Features and Benefits

#### Revolutionarily new design

Yealink 's SIP Phones continue to evolve, the SIP-T4 Series have been designed by pursuing ease of use in even the tiniest details, these new design include paper label free design, new foot stand allows two posi-tions for the device, non-slip rubber feet, ergonomic recessed buttons etc.

#### HD Audio

Yealink Optima HD Voice refers to the combination of software and hardware design as well as the implementation of wideband technology to maximizes the acoustic performance. Coupled with advanced acoustic clarity technology such as full duplex, echo cancellation, adaptive jitter buffer etc. Creating an amazing face-to-face live experience.

#### A rich visual experience for applications

SIP-T46G Supports vast productivity-enhancing feature such as XML Browser, SCA, BLF List, call forward, call transfer, 3-way conferencing, the 4.3 inch backlit color display enables rich visual presentation and easier navigation of the menu. Three pages of 10 flexible buttons are shown on the display can be programmed up to 27 various features.

#### Advanced connectivity and expandability

For network connectivity, the SIP-T46G comes with two Gigabit Ethernet ports, one of them suitable for Power over Ethernet. Supports a variety device connections, including EHS headset and USB. User enable Bluetooth headset through USB Dongle.

Supports up to 6 Expansion Module, adding up to 240 additional buttons with a screen based LCD display and LED system.

#### Highly secure transport and interoperability

The Communicator uses SIP over Transport Layer Security (TLS/SSL) to provide service providers the latest technology for enhanced network security. The range is certified compatible with 3CX, Asterisk and BroadSoft Broadworks, ensuring excellent compatibility with leading soft switch suppliers.

- > Revolutionarily new design
- > Yealink Optima HD voice
- > Dual-port Gigabit Ethernet
- > 4.3" 480 x 272-pixel color display with backlight
- > Built-in a USB port, support Bluetooth headset (Through USB Dongle)
- > Up to 6 SIP accounts
- > Paper label free design
- > PoE support
- > Headset, EHS support
- > Supports expansion modules
- > Stand with 2 adjustable angles
- > Wall mountable
- > Simple, flexible and secure provisioning options

## Audio Features

- > HD voice: HD handset, HD speaker
- > Codecs: G.722, G.711(A/μ), G.723, G.729AB, G.726, GSM, iLBC
- > DTMF: In-band, Out-of-band(RFC 2833) and SIP INFO
- > Full-duplex hands-free speakerphone with AEC
- > VAD, CNG, AEC, PLC, AJB, AGC

## Phone Features

- > 6 VoIP accounts
- > Call hold, mute, DND
- > One-touch speed dial, hotline
- > Call forward, call waiting, call transfer
- > Group listening, SMS, emergency call
- > Redial, call return, auto answer
- > 3-way conferencing
- > Direct IP call without SIP proxy
- > Ring tone selection/import/delete
- > Set date time manually or automatically
- > Dial plan
- > XML Browser
- > Action URL/URI

## Directory

- > Local phonebook up to 1000 entries
- > Black list
- > XML/LDAP remote phonebook
- > Intelligent search method
- > Phonebook search/import/export
- > Call history: dialed/received/missed/forwarded

## IP-PBX Features

- > Busy Lamp Field (BLF)
- > Bridged Line Appearance(BLA)
- > Anonymous call, anonymous call rejection
- > Hot-desking
- > Message Waiting Indicator (MWI)
- > Voice mail
- > Call park, call pickup
- > Intercom, paging
- > Music on hold
- > Call completion
- > Call recording

## Display and Indicator

- > 4.3" 480 x 272-pixel color display with backlight
- > 16 bit depth color
- > LED for call and message waiting indication
- > Dual-color (red or green) illuminated LEDs for line status information
- > Wallpaper
- > Intuitive user interface with icons and soft keys
- > National language selection
- > Caller ID with name, number and photo

## Feature keys

- > 10 line keys with LED
- > 10 line keys can be programmed up to 27 various features (3-page view)
- > 7 features keys: message, headset, hold, mute, transfer, redial, hands-free speakerphone
- > 4 context-sensitive "soft" keys
- > 6 navigation keys
- > Volume control keys
- > Illuminated mute key
- > Illuminated headset key
- > Illuminated hands-free speakerphone key

## Interface

- > Dual-port Gigabit Ethernet
- > Support Bluetooth headset through USB Dongle
- > 1xRJ9 (4P4C) handset port
- > 1xRJ9 (4P4C) headset port
- > 1XRJ12 (6P6C) EXT port:  
Supports up to 6 Expansion Modules for an attendant console application
- > Power over Ethernet (IEEE 802.3af), class 3

## Other Physical Features

- > Stand with 2 adjustable angles
- > Wall mountable
- > External universal AC adapter (optional):  
AC 100~240V input and DC 5V/2A output
- > Power consumption (PSU): 1.8-5.4W
- > Power consumption (PoE): 2.1-8.0W
- > Dimension(W\*D\*H\*T):  
244mm\*213mm\*185mm\*54mm
- > Operating humidity: 10~95%
- > Storage temperature: -10~50°C

## Management

- > Configuration: browser/phone/auto-provision
- > Auto provision via FTP/TFTP/HTTP/HTTPS for mass deploy
- > Auto-provision with PnP
- > BroadSoft device management
- > Zero-sp-touch, TR-069
- > Phone lock for personal privacy protection
- > Reset to factory, reboot
- > Package tracing export, system log



## Network and Security

- > SIP v1 (RFC2543), v2 (RFC3261)
- > Call server redundancy supported
- > NAT transverse: STUN mode
- > Proxy mode and peer-to-peer SIP link mode
- > IP assignment: static/DHCP/PPPoE
- > HTTP/HTTPS web server
- > Time and date synchronization using SNTP
- > UDP/TCP/DNS-SRV(RFC 3263)
- > QoS: 802.1p/Q tagging (VLAN), Layer 3 ToS DSCP
- > SRTP for voice
- > Transport Layer Security (TLS)
- > HTTPS certificate manager
- > AES encryption for configuration file
- > Digest authentication using MD5/MD5-sess
- > OpenVPN, IEEE802.1X
- > IPv6

## Package Features

- > Qty/CTN: 5 PCS
- > N.W/CTN: 8.1KG
- > G.W/CTN: 9.16K
- > Giftbox size: 274mm\*258mm\*142mm
- > Carton Meas: 732mm\*286mm\*266mm

## Certifications

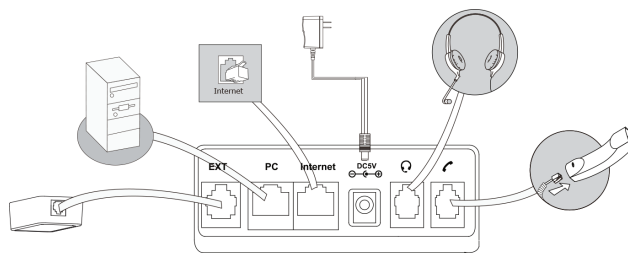

## DIMENSION SYSTEMS

creating solutions with *technology*

To find our more:

Visit: [www.DimensionSystems.com](http://www.DimensionSystems.com)

### Guam Office

643 Chalan San Antonio STE 107  
DFS Pacific Plaza,  
Tamuning, Guam 96913-3644  
Phone: (671) 646-2007 | Fax: (671) 646-2006  
Email us at: [sales@DimensionSystems.com](mailto:sales@DimensionSystems.com)

### Philippine Office - DSI TECHNOLOGY

Suite 3004, 30/F Antel Global Corporate Center  
Julia Vargas Ave., Ortigas Center  
Pasig City, Philippines 1603  
Phone: (632) 900-0198  
Email us at: [salesph@DimensionSystems.com](mailto:salesph@DimensionSystems.com)